

Homogeneous Vinyl Sheet

Homogeneous Vinyl Sheet

The Accolade® collection is a premium Australian made commercial homogeneous vinyl sheet flooring, offering a timeless selection of classic colours alongside a refreshed palette inspired by iconic Australian landmarks.

This versatile range includes Accolade Plus®, Accolade Safe®, and Accolade Foothold® designed to ensure continuity of colour between wet barefoot and dry areas, while meeting the specific performance requirements of each space, making it ideal for healthcare, aged care, education, hospitality and commercial applications.

The exclusive formulation combined with consolidated homogeneous chip construction throughout the thickness of the floor, provides optimum performance, ultimate protection and a low maintenance surface to enhance cleaning.

For a customised flooring solution, the Infinity® range uses the Accolade® formulation to develop a bespoke colourway to create a space to work within your design scheme and bring your project to life.

Features & Benefits



LOW MAINTENANCE

PUR coating making it easy to clean and maintain



SLIP RESISTANT

Reduce slips to create a safer environment*



HIGH FOOT TRAFFIC

Designed to withstand areas with high traffic flow[^]



HIGHLY DURABLE

Superior even wear for a consistent appearance



HYGIENIC SURFACE

Help prevent mould and bacteria growth




WET BAREFOOT

Suitable for shower areas to provide slip resistance*



ULTRA LOW VOC

Ideal for those with allergies and chemical sensitivities



PHTHALATE FREE

Made without phthalates for a healthier environment



Sand Grey

A blend of soft grey and warm undertones, Sand Grey offers a timeless and versatile foundation for any interior.





Spice White & Bells Blue

The white and blue colour palette evokes a clean, fresh and hygienic feel, making it ideal for healthcare environments.



Accolade® Classics Collection

Colour Palette

Roll size: 2.0mm x 1.83m x 20m



Spice WhitePlus | 5A503561
Foothold | 5A523561



LRV 43.8

LRV 21.91

Mallee Wheat Plus | 5A503911

LRV 67.93

LRV 42.18



Ceduna White Plus | 5A503011 Foothold | 5A523011



Darling Grey Plus | 5A503721

LRV 65.48

LRV 28.13

LRV 35.33



CappuccinoPlus | 5R503571
Foothold | 5A523571
Safe | 5A513571



Iron Bark
Plus | 5A503611
Safe | 5A513611



Murray Clay Plus | 5A503711 Safe | 5A513711



Bells BluePlus | 5A503491
Safe | 5A513491

LRV 23.33

Colour swatches and photographic image may vary between digital brochure to real life product and are to be used as a guide only
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via <u>AU website</u> or <u>NZ website</u>

Accolade® Classics Collection

Colour Palette

Roll size: 2.0mm x 1.83m x 20m



Camden Grey
Plus | 5A503941
Foothold | 5A523941
Safe | 5A513941



Sand Grey
Plus | 5A503151
Foothold | 5A523151
Safe | 5A513151

LRV 26.4



Black Opal
Plus | 5A503621
Foothold | 5A523621
Safe | 5A513621

LRV 13.2

LRV 39.96

Colour swatches and photographic image may vary between digital brochure to real life product and are to be used as a guide only

It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via <u>AU website</u> or <u>NZ website</u>



Colour Palette

Roll size: 2.0mm x 1.83m x 20m



KankuPlus | 5A504131
Foothold | 5A524131



LRV 50.18


LRV 21.43

Hawkesbury Plus | 5A504121 Foothold | 5A524121

LRV 65.30




Larapinta Plus | 5A504281

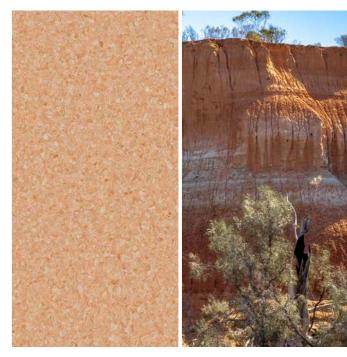

Red Cliffs
Plus | 5A504261
Foothold | 5A524261

LRV 47.46

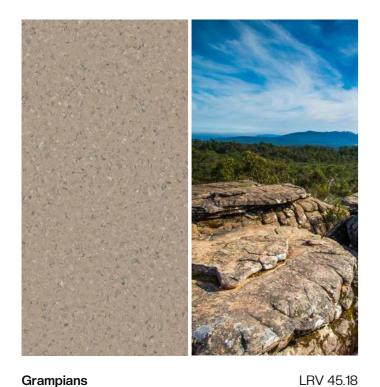

Grampians
Plus | 5A504241
Safe | 5A514241



Snapper Rocks
Plus | 5A504271



Windorah Plus | 5A504151



Simpson Desert Plus | 5A504211 Safe | 5A51421

LRV 37.32

LRV 24.63

Colour swatches and photographic image may vary between digital brochure to real life product and are to be used as a guide only
It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via <u>AU website</u> or <u>NZ website</u>

Colour Palette

Roll size: 2.0mm x 1.83m x 20m

LRV 26.33









LRV 33.99

Bega Valley Plus | 5A504161 Foothold | 5A524161





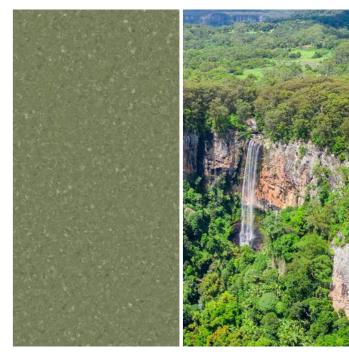

Springbrook Plus | 5A504301

LRV 42.20



Mangrove Plus | 5A504321 Safe | 5A514321

LRV 24.63

LRV 55.76


Colour swatches and photographic image may vary between digital brochure to real life product and are to be used as a guide only It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via AU website or NZ website

Colour Palette

Roll size: 2.0mm x 1.83m x 20m



Lucky Bay Plus | 5A504291 Foothold | 5A524291



LRV 41.74

LRV 17.28

Kiama Plus | 5A504141 Foothold | 5A524141

LRV 66.72

LRV .74




ThredboPlus | 5A504201
Foothold | 5A524201



Esperence Plus | 5A504191 Foothold | 5A524191


LRV 38.57

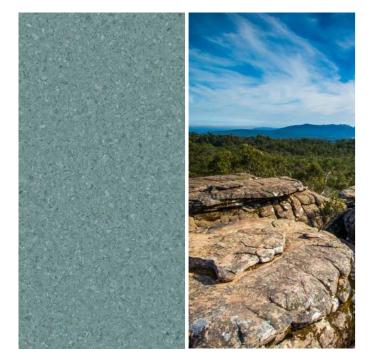

TorquayPlus | 5A504231
Safe | 5A514231



Moreton Fig Plus | 5A504221

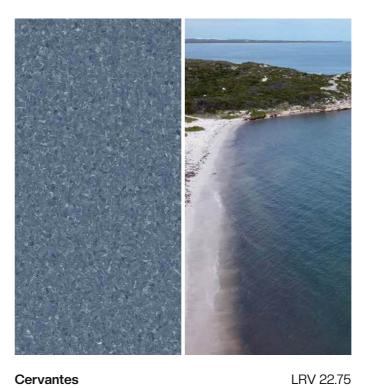

Cervantes
Plus | 5A504111
Foothold | 5A524111



Coral Sea
Plus | 5A504331

LRV 13.26

Colour swatches and photographic image may vary between digital brochure to real life product and are to be used as a guide only

It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via <u>AU website</u> or <u>NZ website</u>

Colour Palette

Roll size: 2.0mm x 1.83m x 20m




Whitehaven Plus | 5A503771 Foothold | 5A523771




OberonPlus | 5A504181
Foothold | 5A524181

LRV 64.54

LRV 44.92

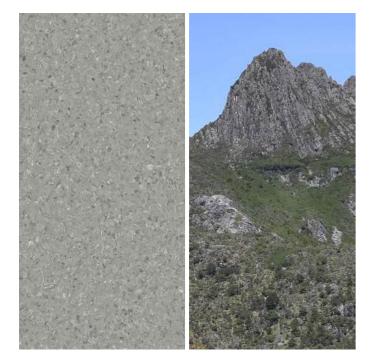

Cradle Mountain
Plus | 5A504251
Foothold | 5A524251
Safe | 5A514251

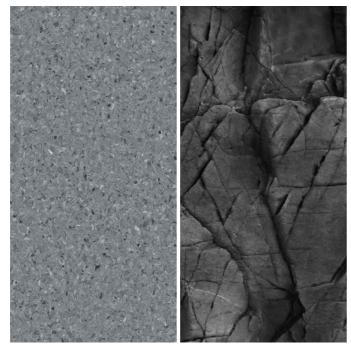

Mintaro Slate Plus | 5A503931 Foothold | 5A523931

LRV 23.55

Colour swatches and photographic image may vary between digital brochure to real life product and are to be used as a guide only

It is recommended you request an actual product sample by contacting your Armstrong Flooring representative or ordering a sample online via <u>AU website</u> or <u>NZ website</u>

LRV 35.61



Room Visualizer


Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking on your relevant country below.

AUSTRALIA

NEW ZEALAND

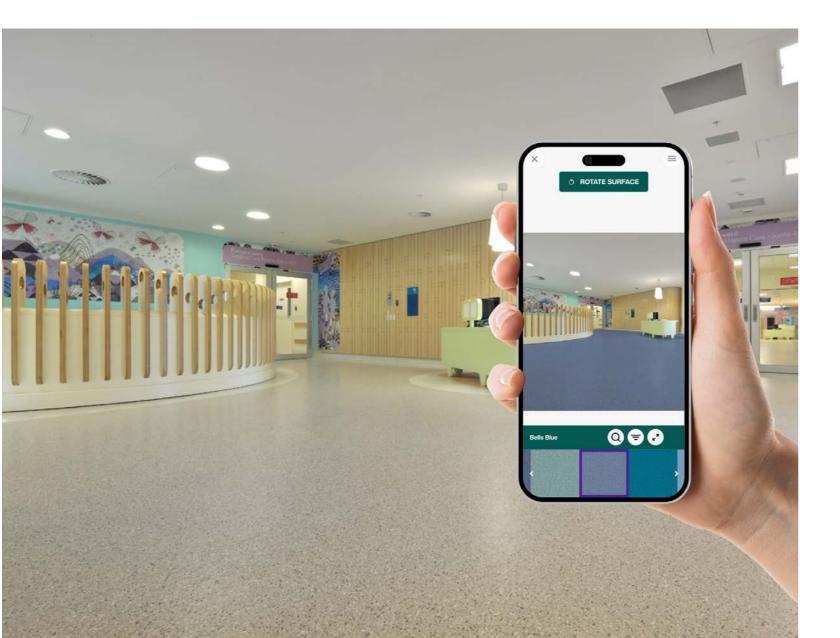

Accolade® Collection



Product Classification

Toddot Olassification		Accolade - I lus	Accolade - I dottiold	Accolade - Gale
Type of floor covering	ISO 10581	Homogeneous sheet vinyl	Homogeneous sheet vinyl	Homogeneous sheet vinyl
Wear Class	ISO 10581	Type I	Type I	Туре І
Classification (Use Area)	ISO 10874	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)
Varranty*	Commercial - available upon request	15 years	15 years	15 years
All warranties are in addition to any rights or ontact your Armstrong Flooring representa	onsumers may have under Australian and New titive.	Zealand consumer laws. Terms and condition	ons apply - for full information in respect to	the scope of the commercial warrant
Physical Properties				
Manufactured in	-	Australia	Australia	Australia
Polyurethane reinforced	_	Yes PUR	Yes PUR + Aluminium Oxide	
Colours (Standard)	-	36	20	12
Overall thickness	ISO 24346	2.0mm	2.0mm	2.0mm
Surface texture	=	Lightly embossed	Embossed	Embossed
Roll width	ISO 24341	1.83m	1.83m	1.83m
Roll length	ISO 24341	20m	20m	20m
Coverage/roll	-	36.6m²	36.6m ²	36.6m²
Product weight/m ²	ISO 23997	3.0kg/m²	2.9kg/m ²	2.9kg/m²
Installation			2.51.911	
IIstaliation	To current AS/NZS 1884 and Armstrong Flooring Installation Instructions – Homogeneous Vinyl Sheet Flooring	Full stick, reverse sheets, heat weld or seambond seams	Full stick, reverse sheets, heat weld or seambond seams	Full stick, reverse sheets, heat weld or seambond seams
Sustainability				
GreenTag GreenRate	-	GreenRate Level A	GreenRate Level A	GreenRate Level A
GreenTag LCARate	-	LCARate Gold	LCARate Gold	LCARate Gold
Environmental Product Declaration	-	Yes	Yes	Yes
Best Environmental Practice PVC	-	Yes	Yes	Yes
TVOC Emissions	-	Compliant with Green Building Council low VOC emission rates	Compliant with Green Building Council low VOC emission rates	Compliant with Green Building Council low VOC emission rates
Technical Performance				
0				
Slip Resistance	AS 4586 Wet Pendulum (Appendix A) Wet Barefoot (Appendix C) Oil Wet (Appendix D)	P3 - R10	P4 B R11	P4 B R10
Slip Hesistance	Wet Pendulum (Appendix A) Wet Barefoot (Appendix C)	-	В	В
iire Resistance (Floor)	Wet Pendulum (Appendix A) Wet Barefoot (Appendix C) Oil Wet (Appendix D) AS ISO 9239-1 Critical Radiant Flux (CHF Value)	- R10 ≥ 4.5kW/m²	B R11 ≥ 4.5kW/m²	B R10 ≥ 4.5kW/m ²
iire Resistance (Floor) iire Resistance (Walls)	Wet Pendulum (Appendix A) Wet Barefoot (Appendix C) Oil Wet (Appendix D) AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate AS 5637.1 Cone Calorimeter	- R10 ≥ 4.5kW/m² ≤ 750%.min	B R11 ≥ 4.5kW/m ² ≤ 750%.min	B R10 ≥ 4.5kW/m ² ≤ 750%.min
Fire Resistance (Floor) Fire Resistance (Walls)	Wet Pendulum (Appendix A) Wet Barefoot (Appendix C) Oil Wet (Appendix D) AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate AS 5637.1 Cone Calorimeter Average specific extinction area	- R10 ≥ 4.5kW/m² ≤ 750%.min Group 3 < 250m²/kg	B R11 ≥ 4.5kW/m² ≤ 750%.min Group 3 < 250m²/kg	B R10 ≥ 4.5kW/m² ≤ 750%.min Group 3 < 250m²/kg
Fire Resistance (Floor) Fire Resistance (Walls) Other Colour fastness	Wet Pendulum (Appendix A) Wet Barefoot (Appendix C) Oil Wet (Appendix D) AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate AS 5637.1 Cone Calorimeter	- R10 ≥ 4.5kW/m² ≤ 750%.min	B R11 ≥ 4.5kW/m ² ≤ 750%.min	B R10 ≥ 4.5kW/m ² ≤ 750%.min
Fire Resistance (Floor) Fire Resistance (Walls) Other Colour fastness Residual indentation	Wet Pendulum (Appendix A) Wet Barefoot (Appendix C) Oil Wet (Appendix D) AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate AS 5637.1 Cone Calorimeter Average specific extinction area	- R10 ≥ 4.5kW/m² ≤ 750%.min Group 3 < 250m²/kg	B R11 ≥ 4.5kW/m² ≤ 750%.min Group 3 < 250m²/kg	B R10 ≥ 4.5kW/m² ≤ 750%.min Group 3 < 250m²/kg
	Wet Pendulum (Appendix A) Wet Barefoot (Appendix C) Oil Wet (Appendix D) AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate AS 5637.1 Cone Calorimeter Average specific extinction area	- R10 ≥ 4.5kW/m² ≤ 750%.min Group 3 < 250m²/kg ≥ 6 ≤ 0.1mm (av)	B R11 ≥ 4.5kW/m² ≤ 750%.min Group 3 < 250m²/kg ≥ 6 ≤ 0.1mm (av)	B R10 ≥ 4.5kW/m² ≤ 750%.min Group 3 < 250m²/kg ≥ 6 ≤ 0.1mm (av)

Accolade® Plus

Accolade® Footbold

Accolade® Safe

Accreditation

Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management system

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au or armstrongflooring.co.nz
All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable stan dards and the Armstrong Flooring Installation Instructions.

Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.







Learn more

www.armstrongflooring.au/accolade



www.armstrongflooring.co.nz/accolade



ArmstrongFlooring*

Australia

29-39 Mills Road, Braeside VIC 3195 1800 632 624 customerservices@armstrongflooring.au www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021 0800 449 649 customerservices@armstrongflooring.co.nz www.armstrongflooring.co.nz