



ArmstrongFlooring™

Natural Creations EarthCuts®

Luxury Vinyl Plank

Concrete

Natural Creations EarthCuts®

Luxury Vinyl Plank

Discover the beauty of Natural Creations EarthCuts®, a premium flooring collection that captures the timeless appeal of terrazzo, stone, and concrete. This luxurious range is available in a variety of square and rectangular tile sizes, offering flexibility in design and allowing you to create a distinctive space.

With its combination of resilience, practicality, and sophisticated design, it's the perfect choice for those seeking a floor that not only looks good but performs exceptionally well over time. With a waterproof surface, scratch and stain resistance, and low maintenance properties, it retains its appearance even in high traffic areas.

Suitable for an array of interiors including residential homes and apartments, retail stores, schools and childcare centres, offices, retirement living and healthcare facilities, there's a design sure to elevate your home or project.

Features & Benefits



EASY CLEAN

Low maintenance properties make cleaning easier



SCRATCH RESISTANT

Protection so your floors look newer for longer



STAIN RESISTANT

For peace of mind for life's mishaps



HIGHLY DURABLE

Designed for foot traffic and offers longevity



FAMILY FRIENDLY

Ideal for everyday living so you can enjoy your floors



WATERPROOF SURFACE

Ideal for spill prone areas such as kitchens*



HIGHFOOT TRAFFIC

Designed for foot traffic offering longevity



PET FRIENDLY

Easy to keep clean and maintain with pets

*Subject to proper installation and care and maintenance as set out in the Armstrong Flooring Installation Instructions and Cleaning and Care Instructions.



Sandstone

Natural Creations EarthCuts®

Firenze Terrazzo

Soft neutral base enhanced with grey and white accents for a luxurious yet grounded feel.





Natural Creations EarthCuts® Concrete

A refined mid-grey with the perfect balance of industrial cool and natural warmth.



Natural Creations EarthCuts®

Colour Palette

Plank size: refer to each colour



Sierra Soft White
457mm x 457mm

LRV 52.84



Sandstone
457mm x 457mm
610mm x 305mm

LRV 48.31




Raw Crete - Cool Stone
500mm x 500mm

LRV 30.21



Polished Concrete - Light Grey
500mm x 500mm

LRV 33.54

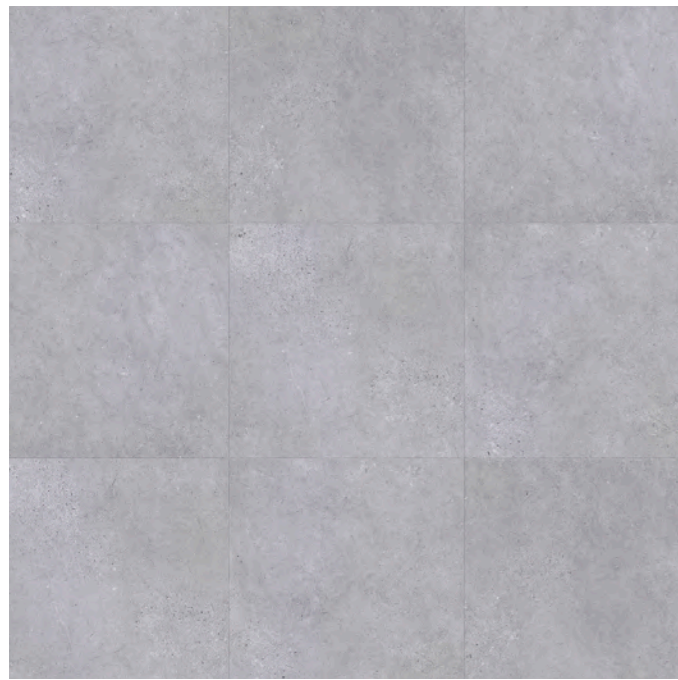

Concrete
457mm x 457mm
610mm x 305mm

LRV 40.94



Slate
457mm x 457mm
610mm x 305mm

LRV 24.84



Polished Concrete- Dark Grey
500mm x 500mm

LRV 19.04



Polished Grey
914mm x 914mm


LRV 19.07

Natural Creations EarthCuts®

Colour Palette

Plank size: refer to each colour

Plank size: refer to each colour

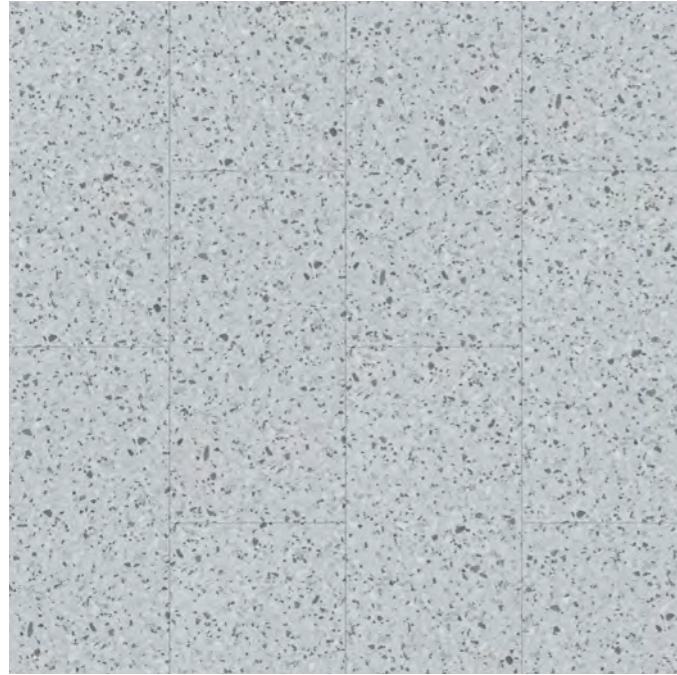

Firenze Terrazzo
914mm x 457mm (0.55 WL)

LRV 45.67

Genova Terrazzo
914mm x 457mm (0.55 WL)

LRV 35.74

Aggregate Miele
914mm x 457mm (0.55 WL)

LRV 32.55

Polished Aggregate
914mm x 457mm (0.70 WL)

LRV 23.66



Milano Terrazzo
914mm x 457mm (0.55 WL)

LRV 33.43



Granite Black
457mm x 457mm

LRV 6.75



Natural Creations EarthCuts®

Room Visualiser

Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking on your relevant country below.

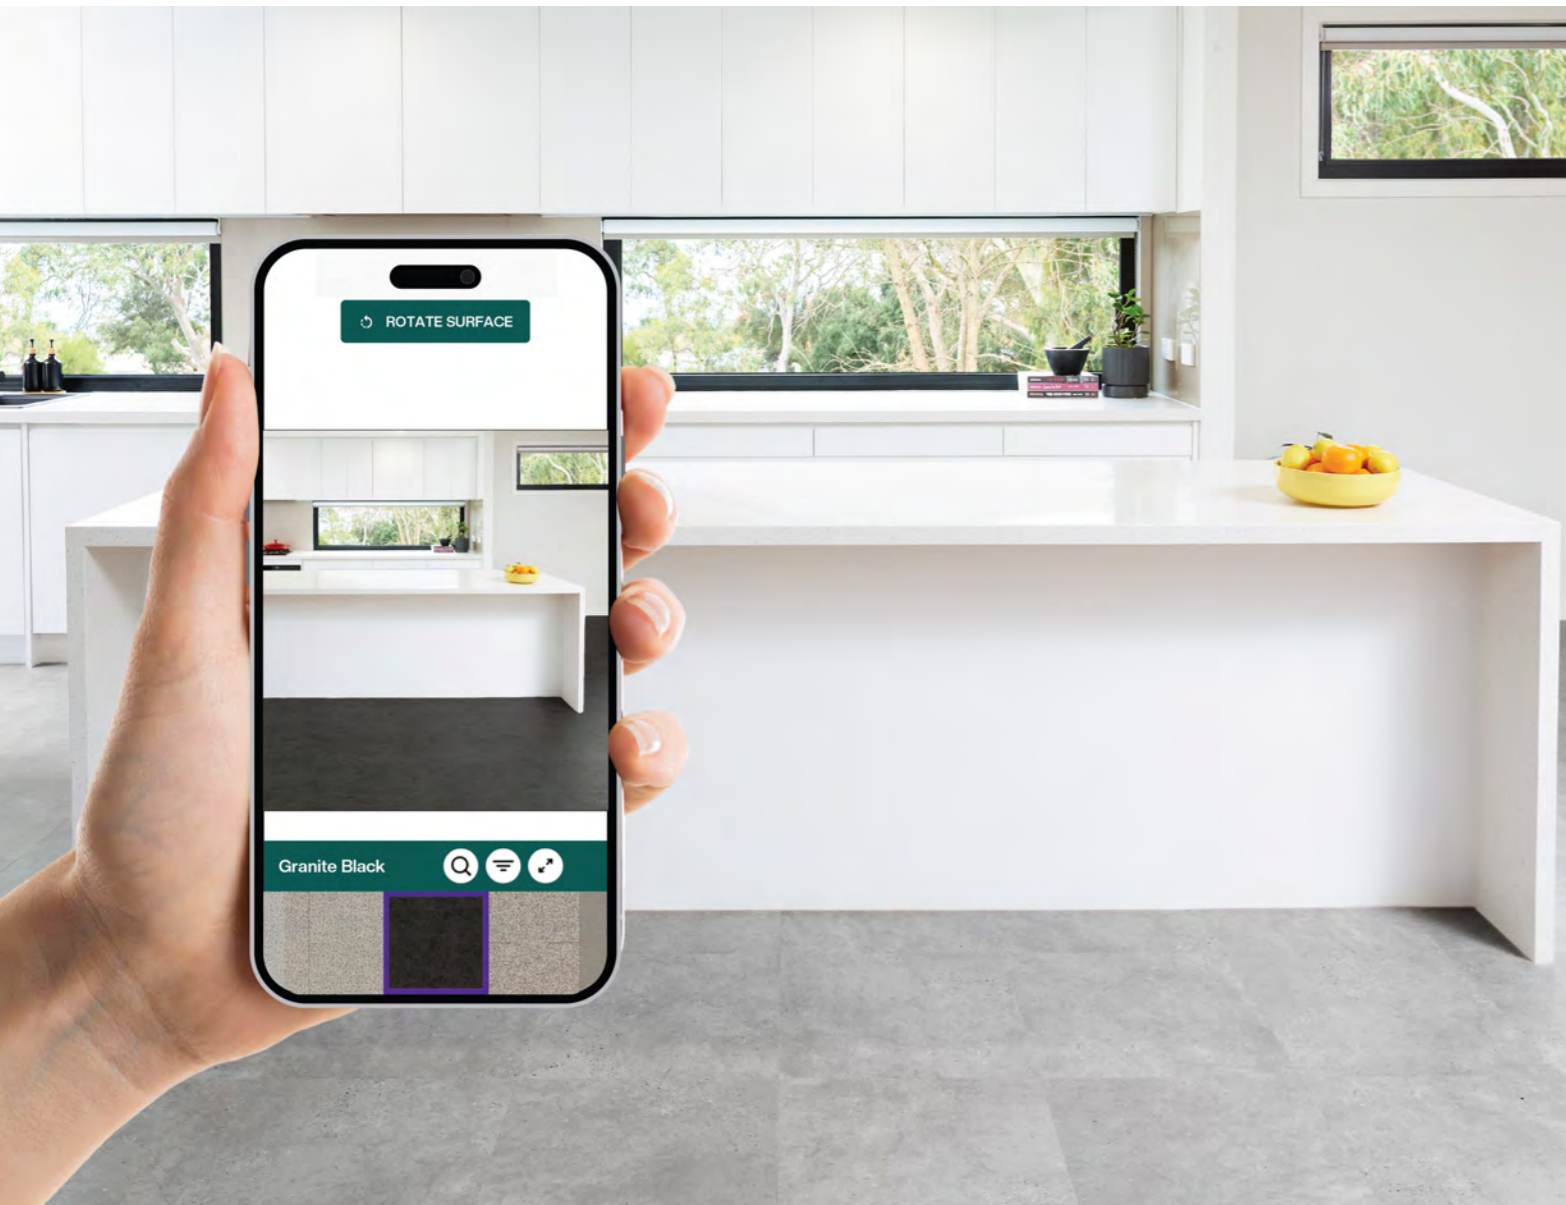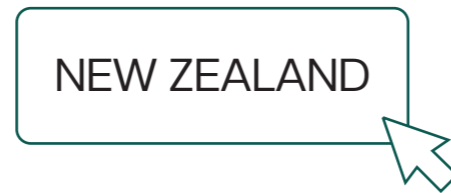

Natural Creations EarthCuts®

Technical Data

Product Classification

Type of floor covering	EN/ISO 10582	Luxury Vinyl Tile
Wear Class	EN/ISO 10582	Type I
Classification (Use Area)	ISO 10874	Domestic: 23 (Heavy) Commercial: 33 (Heavy) Light Industrial: 42 (General)
Warranty*	Residential Commercial - available upon request	25 years 15 years

*All warranties are in addition to any rights consumers may have under Australian and New Zealand consumer laws. Terms and conditions apply - for full information in respect to the scope of the residential warranty, please see armstrongflooring.au or armstrongflooring.co.nz or contact our Head Office. For the commercial warranty, contact your Armstrong Flooring representative.

Physical Properties

		Natural Creations EarthCuts® 457 x 457	Natural Creations EarthCuts® 610 x 305	Natural Creations EarthCuts® 914 x 457 (0.55 WL)	Natural Creations EarthCuts® 914 x 914	Natural Creations EarthCuts® 914 x 457 (0.70 WL)	Natural Creations EarthCuts® 500 x 500
Overall thickness (mm)	ISO 24346	2.5	2.5	2.5	2.5	2.5	5.0
Wear layer (mm)	ISO 24340	0.55	0.55	0.55	0.70	0.70	0.55
Surface Treatment		PUR	PUR	PUR	PUR	PUR + Aluminium Oxide	PUR
Bevel		Yes	Yes	Yes	Yes	Yes	Yes
Dimensions (mm)		457 x 457	610 x 305	914 x 457	914 x 914	914 x 457	500 x 500
Colours (Standard)		5	3	4	1	1	2
Tiles/carton		16	16	8	6	10	8
m ² /carton		3.34	2.97	3.34	5.01	4.18	3.34
m ² /pallet		213.76	225.72	220.4	210.42	225.72	108
kg/carton		14.5	13.13	14.71	18.73	16.07	14.21

Installation

To current AS/NZS 1884 and Armstrong Flooring Installation Instructions – LVT/P

Sustainability

Global GreenTag	GreenRate Level A
TVOC Emissions	Compliant with Green Building Council low emitting VOC emission rates

Technical Performance

Slip Resistance	AS 4586 Wet Pendulum (Appendix A)	P3
Fire Resistance (Floor)	AS ISO 9239-1 Critical Radiant Flux (CHF Value) Smoke Development Rate	≥ 4.5kW/m ² ≤ 750% min
Acoustic	ISO 10140-3 & ISO 717-2 Impact sound insulation	L _{n,w} = 43dB <small>Acoustic Absorber EN 690-2 Group 1 Colour fastness ISO 105-B02, Method 3 Pass Other Technical Performance (50mm concrete with 3mm underlay and drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)</small> L _{n,w} = 57dB <small>(50mm concrete and drop ceiling - no underlay 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)</small>
	ASTM E989-21 Impact insulation class	IIC = 67 <small>(50mm concrete with 3mm underlay and drop ceiling - 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)</small> IIC = 46 <small>(50mm concrete and drop ceiling - no underlay 288mm cavity, 50mm glass wool insulation, 12mm gypsum board)</small>
Other		
Colour fastness	ISO 105-B02, Method 3	Pass

Accreditation

Manufactured under accredited ISO 9001 quality and ISO 14001 environmental management systems

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring.au or armstrongflooring.co.nz

All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.

Variations may occur between samples, photographic images, and batches in terms of colour, shade, pattern or similar.



Learn more

www.armstrongflooring.au/earthcuts



www.armstrongflooring.co.nz/earthcuts



Armstrong Flooring™

Australia

29-39 Mills Road, Braeside VIC 3195
1800 632 624
customerservices@armstrongflooring.au
www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021
0800 449 649
customerservices@armstrongflooring.co.nz
www.armstrongflooring.co.nz