

Homogeneous Vinyl Sheet

The Natralis® Collection is a high-quality, Australian made commercial vinyl sheet flooring, inspired by the country's natural beauty. Natralis® captures the essence of Australia's landscapes and wildlife, offering authentic and vibrant designs. Play with colour, connect with place®.

The collection features Natralis® and Natralis® Foothold, tailored for various environments including healthcare, aged care, education, hospitality, and commercial settings. Designed to maintain colour continuity across wet and dry areas, Natralis® meets specific performance standards for each application.

For a customised flooring solution, our Infinity® range uses the Natralis® formulation to develop a bespoke colourway to create a space to work within your design scheme and bring your project to life.

Features & Benefits



LOW MAINTENANCE

PUR coating makes it easy to clean and maintain



SLIP RESISTANT

Reduce slips to create a safer environment*



HIGH FOOT TRAFFIC

Designed to withstand areas with high traffic flow[^]



WET BAREFOOT

Suitable for shower areas to provide slip resistance*



HIGHLY DURABLE

Superior even wear for a consistent appearance




LOW VOC

Ideal for those with allergies and chemical sensitivities




HYGIENIC SURFACE

Helps prevent mould and bacteria growth



PHTHALATE FREE

Made without phthalates for a healthier environment

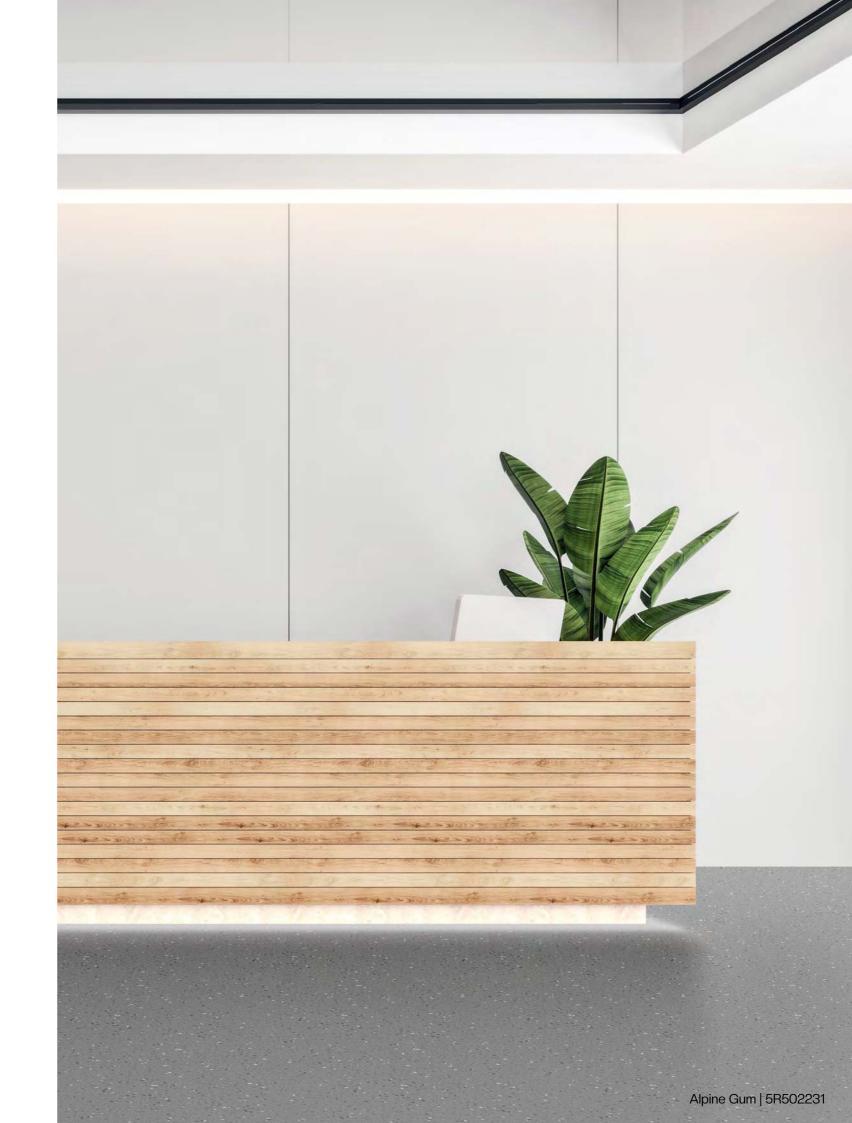






Colour Palette

Roll size: 2.0mm x 1.83m x 20m



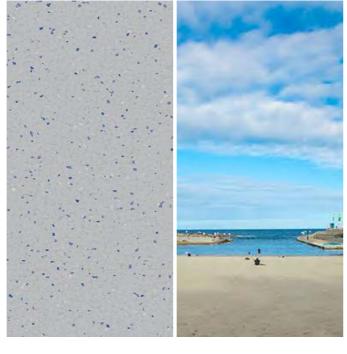





Saltbush | 5R502241 Foothold | 5R522241

LRV 58.28

Clovelly Beach | 5R502271 Foothold | 5R522271

LRV 55.58

Bilby | 5R502211 Foothold | 5R522211

LRV 62.54

Wallaroo | 5R502121 Foothold | 5R522121

LRV 48.21













Stringy Bark | 5R502221

LRV 44.16

Alpine Gum | 5R502231 Foothold | 5R522231

LRV 32.00

Osprey | 5R502181 Foothold | 5R522181

LRV 48.57

Karri | 5R502171 Foothold | 5R522171

LRV 42.20

Colour Palette

Roll size: 2.0mm x 1.83m x 20m











Quokka | 5R502191 Foothold | 5R522191

LRV 33.83

Billabong | 5R502161 Foothold | 5R522161

LRV 30.93

Wattle | 5R502281

Red Gum | 5R502151 LRV 29.79









Cape Pillar | 5R502311

LRV 19.99

Kookaburra | 5R502201

LRV 13.14

Winton | 5R502141

LRV 21.31

Karijini | 5R502131


LRV 16.42

Colour Palette

Roll size: 2.0mm x 1.83m x 20m





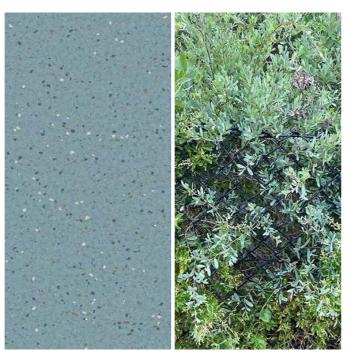







Eucalyptus | 5R502321 Foothold | 5R522321

LRV 29.66

Tea Tree | 5R502251 Foothold | 5R522251

LRV 29.51

Lilico | 5R502291 Foothold | 5R522291

LRV 39.77

Ningaloo | 5R502301

LRV 11.46





LRV 17.70



Windjana | 5R502111

LRV 12.14

Room Visualiser


Flooring is the foundation of any space and an element you want to get right. Our Room Visualiser tool will bring your vision to life and help make the decision-making process easier, all from the convenience of your desktop, mobile or tablet device.

Simply upload a photo of your space or select one of our pre-existing room scenes, and then choose the flooring colour you are interested in. Watch the space transform as you immerse yourself in the various flooring colours and design options.

Start designing today by clicking on your relevant country below.

AUSTRALIA



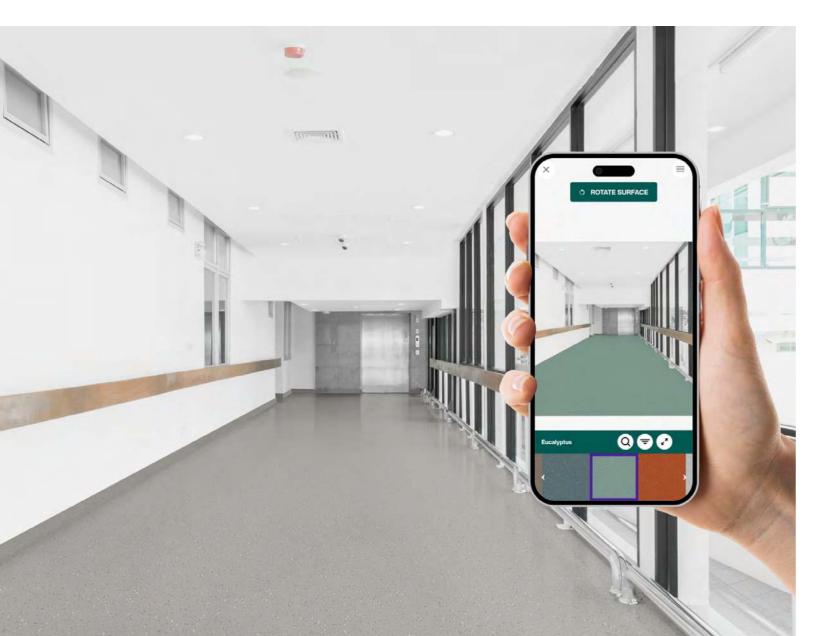

Natralis® Collection



Product Classification		Natralis®	Natralis® Foothold
Type of floor covering	EN ISO 10581	Homogeneous sheet vinyl	Homogeneous sheet vinyl
Binder Content	EN ISO 10581.4.1	Type I	Type I
Classification (Use Area)	ISO 10874	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)
Warranty*	Commercial - available upon request	15 years	15 years
All warranties are in addition to any rights consumers ma	ay have under Australian and New Zealand consumer laws. Terms	and conditions apply - for full information in respec	at to the scope of the commercial warranty,
contact your Armstrong Flooring representative.			
Physical Properties			
Manufactured in	-	Australia	Australia
Polyurethane reinforced	_	Yes PUR	Yes PUR + Aluminium Oxide
Colours (Standard)	=	22	12
Overall thickness	ISO 24346	2.0mm	2.0mm
Surface texture	_	Lightly embossed	Embossed
Roll width	ISO 24341	1.83m	1.83m
Roll length	ISO 24341	20m	20m
Coverage/roll	-	36.6m²	36.6m ²
Product weight/m ²	ISO 23997	3.0kg/m²	2.9kg/m²
_		5.5.13.11	2.01.9111
Installation			
	To current AS/NZS 1884 and Armstrong Flooring Installation Instructions – Homogeneous Vinyl Sheet Flooring	Full stick, reverse sheets, heat weld or seambond seams	Full stick, reverse sheets, heat weld or seambond seams
Sustainability			
GreenTag GreenRate	-	GreenRate Level A	GreenRate Level A
GreenTag LCARate	-	LCARate Gold	LCARate Gold
Environmental Product Declaration	-	Yes	Yes
Best Environmental Practice PVC	-	Yes	Yes
TVOC Emissions	-	Compliant with Green Building Council low VOC emission rates	Compliant with Green Building Council low VOC emission rates
Technical Performance			
Slip Resistance	AS 4586		
•	Wet Pendulum (Appendix A)	P3	P4
	Wet Barefoot (Appendix C) Oil Wet (Appendix D)	- R10	B R11
Fire Resistance (Floor)	AS ISO 9239-1	1110	
THE HESISTANCE (FIGOR)	Critical Radiant Flux (CHF Value)	≥ 4.5kW/m ²	≥ 4.5kW/m ²
	Smoke Development Rate	≤ 750%.min	≤ 750%.min
Fire Resistance (Walls)	AS 5637.1 Cone Calorimeter	Group 3 < 250m²/kg	Group 3 < 250m²/kg
Other	Average specific extinction area	` 200111 /kg	200 //g
Colour fastness	ISO 105-B02, Method 3	Pass	Pass
Residual indentation	ISO 24343-1	Pass	Pass
Chemical resistance	150 24343-1	Good resistance	Good resistance
Flexibility	ISO 24344, Method A	Pass	Pass
Castor chair	ISO 4918	Pass	Pass
Seam strength	ISO 16906	Pass	Pass

Manufactured under accredited ISO 9001 quality, ISO 14001 environmental and ISO 45001 OHS management systems

All specifications are current as at date of publication and may be changed without notice. For current and complete specifications please visit armstrongflooring au or armstrongflooring.co.n.

All Armstrong Flooring products must be installed in accordance with the relevant Australian and/or New Zealand applicable standards and the Armstrong Flooring Installation Instructions.

Variations may occur between samples, photographic images, and batches in terms of colour shade, pattern or similar.







Learn more

www.armstrongflooring.au/natralis



www.armstrongflooring.co.nz/natralis



ArmstrongFlooring*

Australia

29-39 Mills Road, Braeside VIC 3195 1800 632 624 customerservices@armstrongflooring.au www.armstrongflooring.au

New Zealand

39/332 Great North Road, Grey Lynn, Auckland 1021 0800 449 649 customerservices@armstrongflooring.co.nz www.armstrongflooring.co.nz