# Natural Woodgrains

Interface

**Installation Method**



Ashlar Herringbone

All product specifications reflect averages derived from product sample testing, are subject to normal manufacturing and testing tolerances and inherent pattern variances, and may be changed without notice. For more information about these and other important attributes of the product(s) described herein, including recycled content and product warranty information, please see www.interface.com/disclaimer.

**Product** Natural Woodgrains **Colour** Beech **Collection** Level Set Collection

| | |
|---|---|
| **Product Specifications** | |
| Product Number | A002 |
| Product Construction | High Performance Luxury Vinyl Tile contains 39% Pre-Consumer Recycled Content |
| Finish | CERAMOR+™ UV Stabilized Ceramic Bead Coating |
| Wear Layer Thickness | 0.55 mm |
| Total Thickness | ISO 24346 Average value + 0.20mm |
| Size | 25cm x 1m |
| **Performance Specifications** | |
| Castor Chair Rating | ISO 4918 Pass |
| Flammability | EN ISO 13501-1 Class BFl-S1 |
| Dimensional Stability | ISO 23999 <0.25% |
| Curling | (ISO 23999) ≤ 2 |
| Flexibility | ISO 24344 Method A Pass |
| Residual Indentation | ISO 24343-1 |
| Chemical Resistance | EN-ISO 26987 Passes |
| **Environmental Specifications** | |
| Environmental Product Declaration | Download EPD |
| Total Recycled Content | 39 % |
| Indoor Air Quality | FloorScore® SCS-FS-04366 |
| Embodied Carbon (Cradle to Gate) | 9.2 kg $CO_2$ eq./$m^2$ |
| End of Life Options | Fully Recyclable LVT to Carpet Tile Backing Recycling |
| Material Composition | Free of Ortho Phthalates, Added Formaldehyde and Heavy Metal Stabilizers |
| **Technical Information** | |
| Installation | See Interface LVT Installation Guidelines online |
| Maintenance | LVT Maintenance |
| Warranty | 15 Year Standard LVT Product Warranty |
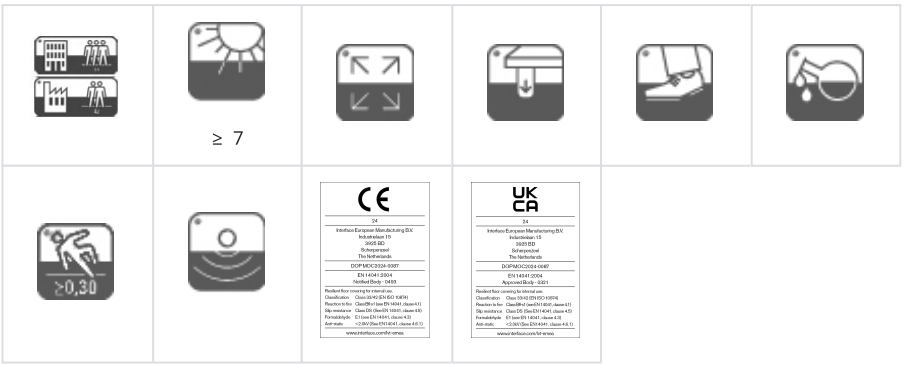
**Certifications**