



iD  
Essential 30  
LVT



SOFT BLUE GUM

### Designed for Australian Spaces


Whether you are renovating one room or the whole home, Tarkett's iD Essential 30 will help you achieve eye-catching, owner-friendly, life-proof results. Our range of LVT (Luxury Vinyl Tile) delivers the beauty of natural wood without the drawbacks. With Tarkett, you can turn your floor into a highlight in every room, and transform your entire home practically overnight.

### Doing Good. Together

Tarkett believes in creating a positive future for everyone, and are committed to taking an environmentally responsible and sustainable approach to manufacturing and product development. With a focus on indoor air quality, we are committed to designing high quality, healthy and sustainable flooring solutions. So when you invest in flooring from Tarkett, you are living the good, good life.

### Easy, Clean, Convenient

Each plank is protected from spills, stains and day-to-day life by a micro-layer of Tarkett TopClean XP™. This patented clear, hard-wearing surface treatment makes our LVT very easy to clean and protects against scratches.



Asthma & allergy friendly



Exceptional air quality outcomes



Extremely low VOC emissions




100% phthalate-free\*


\* The technology Tarkett uses is even approved for use in food containers and toys for young children

## iD Essential 30

Available in 10 contemporary colours, with 5 new designs including Australian Blackbutt and Spotted Gum.

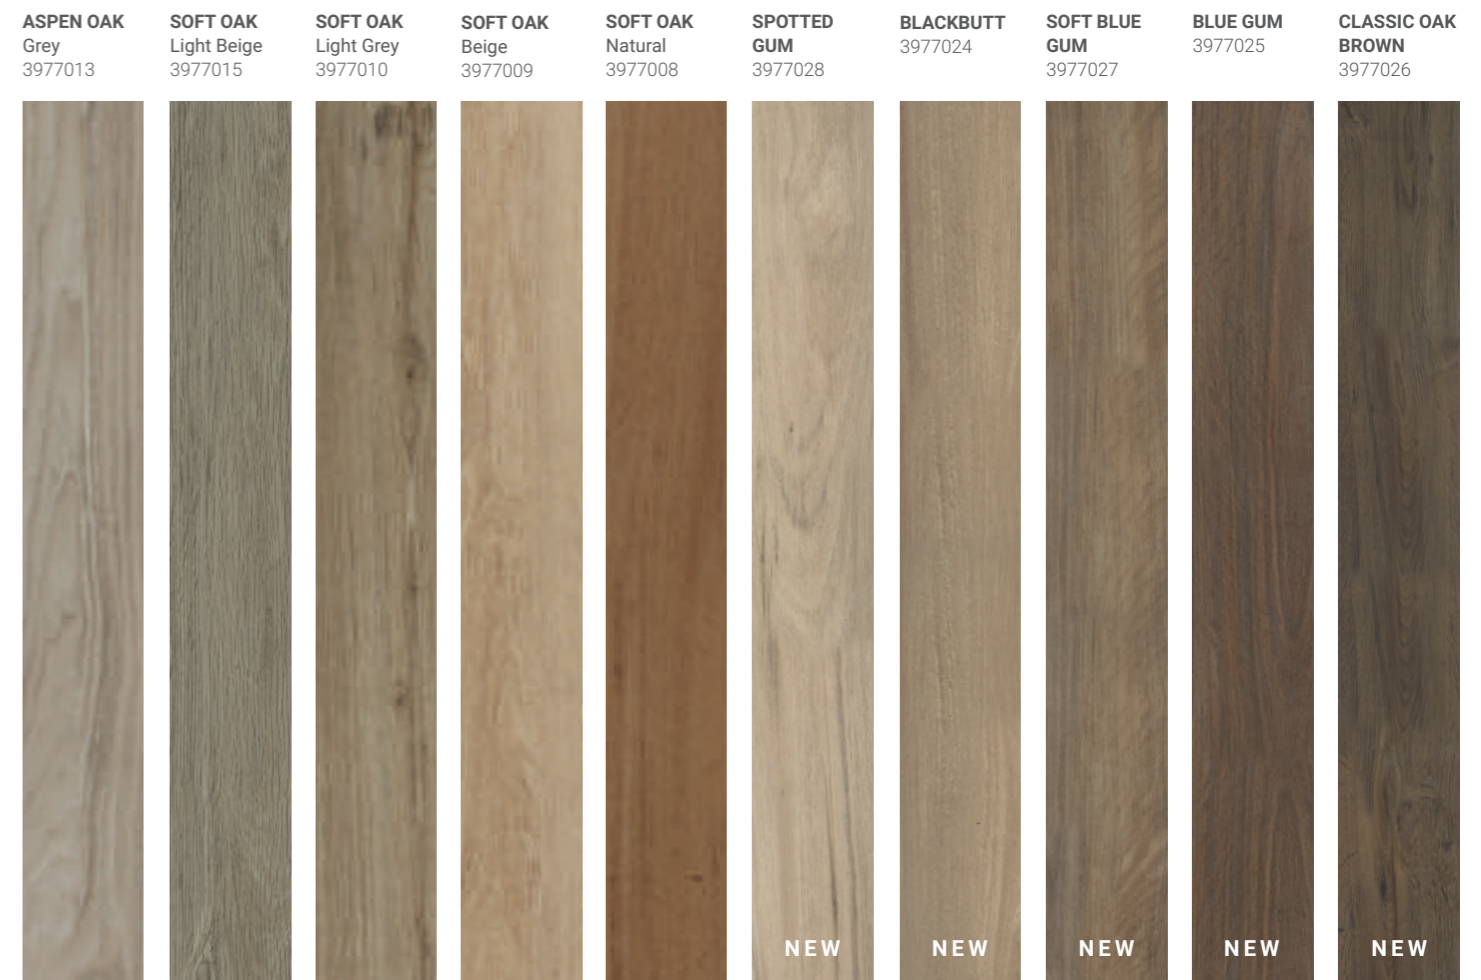

Only 2mm thick, its 3-layer construction ensures iD Essential 30 is dent-resistant and durable. In fact, every plank comes with a 10 year warranty for complete peace of mind.

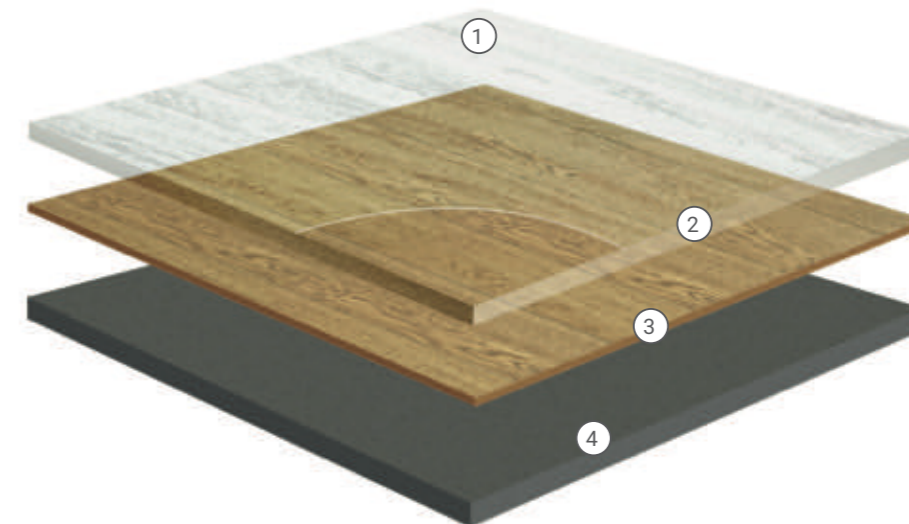

10 Year Residential Warranty

- ① TopClean XP™ PUR layer for resistance to abrasion, scuffs and scratches.
- ② Pure PVC transparent wear layer.
- ③ High definition print design.
- ④ Unique structure reinforced with non-woven glass fibre.

# TECHNICAL DATA SHEET

Certification & classification	Standards	iD Essential 30
Type of floor covering	EN ISO 10582	Compact Resilient Floorcovering
Classification	EN ISO 10874 (EN 685)	Domestic: 23 Commercial: 31
Technical characteristics		
Total thickness	EN ISO 24346 (EN 428)	2.0 mm
Wear layer thickness	EN ISO 24340 (EN 429)	0.30 mm
Total weight	EN ISO 23997 (EN 430)	3.4 kg/m <sup>2</sup>
Wear layer binder content	EN ISO 10582	Type I
Dimensions	EN ISO 24342 (EN 427)	Planks 229 x 1219 mm - 12 planks/box = 3.34 m <sup>2</sup>
Surface treatment (PUR)		Yes - TopClean™
Beveled edges		Yes - 4 Bevels
Technical performances		
Dimensional stability	EN ISO 23999 (EN 434)	≤ 0.25%
Curl resultant to heat	EN ISO 23999 (EN 434)	≤ 2 mm
Reaction to fire	ISO AS 9239-1	Critical radiant flux 10.2 kW/m <sup>2</sup> Smoke 78 %.min
Residual indentation	EN ISO 24343-1 (EN 433)	Required value: ≤ 0.10 mm Average measured value 0.03 mm
Furniture leg	EN 424	No damage
Castor chair	ISO 4918 (EN 425)	No damage
Impact sound reduction	EN ISO 717-2 EN ISO 140-8	ΔLw 4 dB
Thermal resistance	EN ISO 10456	0.07 m <sup>2</sup> K/W
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN ISO 26987 (EN 423)	Good
Slip resistance	AS 4586:2013 DIN 51130/EN 13893	P4 R9
Electrical properties	EN 1815 EN 1081	≤ 2 kV on concrete R1 > 10 <sup>10</sup> Ω
Underfloor heating		Suitable - max. 27 °C

The above information is subject to modification for the benefit of further improvement. (06/24)  
Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett at the address shown for these instructions.

for these instructions.



Disclaimer: Please note that products in photos are installed for creative purposes and not according to technical specifications. Please refer to Tarkett installation instructions for guidance.

Contact: Tarkett Australia  
P: 1300 851 484  
E: customerservice@tarkett.com  
W: www.tarkett.com.au

