


iQ MEGALIT

TECHNICAL DATA

CERTIFICATION & CLASSIFICATION	STANDARDS	iQ Megalit
Type of floor covering	ISO 10581	Homogeneous pressed vinyl flooring. Single layered
Binder content	ISO 10581	Type 1
Classification	ISO 10874	Commercial: 34 Industrial: 43
TECHNICAL CHARACTERISTICS	STANDARDS	iQ Megalit
iQ surface treatment		Yes
Total thickness	ISO 24346	2.0mm
Total weight	ISO 23997	2500 g/m ²
Form of delivery	ISO 24341 Sheet (rolls)	Approx. 23 lm x 200cm Art. no. 3390_ _ _ 3 digit colour colour number
TECHNICAL PERFORMANCES	STANDARDS	iQ Megalit
Dimensional stability	ISO 23999	0.40 % for rolls
Reaction to fire	AS/ISO 9239.1	Critical heat flux 9.0kW/m ² Smoke 288%.min
Residual indentation	ISO 24343-1	Required value: ≤ 0.10 mm Best measured value: 0.02mm
Castor chair	ISO 4918	Suitable
Static electrical propensity	EN 1815	< 2kV
Clean room	ISO 14644-1 ISO 14644-1	Class A ISO Class 3
Total VOC emissions	ISO 16000-6	10 µg/m ³ (after 28 days)
Underfloor heating		Suitable - max 27°C
Thermal resistance	EN 12667	Approx. 0.01 m ² K/W
Light fastness	EN ISO 105-B02	≥ 7
Chemical resistance	ISO 26987	Excellent
Bacteria resistance	EN ISO 846: Part C	Does not favour growth
Slip resistance	DIN 51130 AS 4586	R9 P4
Colours		10

The above information is subject to modification for the benefit of further improvement. (09/22).

Tarkett's Instructions regarding installation, cleaning and maintenance should be observed
Please visit Tarkett.com.au for more information

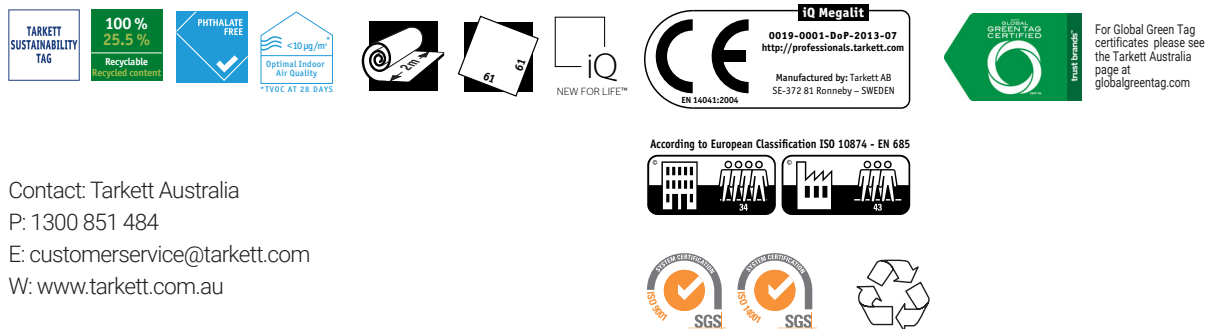

Contact: Tarkett Australia
P: 1300 851 484
E: customerservice@tarkett.com
W: www.tarkett.com.au